

H857/LH857 HARVESTERS



FULL TAIL SWING CARRIERS FOR HIGH PRODUCTION
IN-STAND HARVESTING AND ROADSIDE PROCESSING.

Tigercat®
Tough • Reliable • Productive

KEY BENEFITS

LONG TRACK FRAMES AND FULL TAIL SWING FOR EXCELLENT STABILITY IN LARGE TIMBER AND TOUGH TERRAIN APPLICATIONS. TWO BOOM OPTIONS TO CUSTOMIZE THE CARRIER TO VARIOUS APPLICATIONS, HEAD SIZES AND TIMBER PROFILES. PAIR WITH A TCI HARVESTING HEAD FOR A FULL FACTORY-BACKED PACKAGE.

KEY BENEFITS

- ▶ Unique sloping tail for improved leveling capability, better winch assist cable management, and more swing clearance for obstacle avoidance
- ▶ ER boom technology® improves fuel efficiency, reduces operator fatigue and increases productivity; 3-mode ER provides the operator with a wide range of boom control options
- ▶ Retracting roof enclosure completely exposes the engine and major components while serving as a safe and convenient work platform
- ▶ High capacity cooling. Automatic variable speed for improved fuel efficiency, automatic reversing cycle



OPERATING ENVIRONMENT

- ▶ Full shift comfort. Highly adjustable parallel action air ride seat with integrated heating and cooling. Comfortable cab interior with clear sightlines. Ergonomic positioning of controls and display screens.
- ▶ Convenient HVAC controls allow the operator to adjust fan speed and temperature using the switches on the control panel, or the machine control system touchscreen.



ER BOOM OPTIONS

- ▶ Two efficient ER boom options to customize the carrier to your harvesting or processing requirements.
- ▶ The two-piece boom option benefits from high lifting capacity and increased below grade capability for better performance in steep terrain.
- ▶ Long reach telescopic boom for reduced machine travel, ground disturbance and environmental impact.



OPEN ACCESS

- ▶ The side opening engine roof completely exposes the top and both sides of the engine, hydraulic pumps, valves, cooling system, and daily service points. When open, the enclosure roof serves as a spacious side service platform to work comfortably and safely.





LH857 DESIGNED FOR STEEP SLOPES

- ▶ With exceptional stability, the LH857 is well suited to in-stand harvesting on steep terrain.
- ▶ Optimized weight distribution and low centre of mass, along with Tigercat's patented super duty leveling undercarriage provide excellent stability on steep slopes. The unique sloping tail design provides leveling capability to 26 degrees. Additional clearance improves cable management on winch assist applications, reducing chain rub and interference.
- ▶ Auto leveling. The machine automatically levels the upper frame at the touch of a button.



H857 HARVESTER



POWER: 212 kW (284 hp)
 SWING RADIUS: 3,15 m (10 ft 4 in)
 WEIGHT: 31 900 kg (70,300 lb)

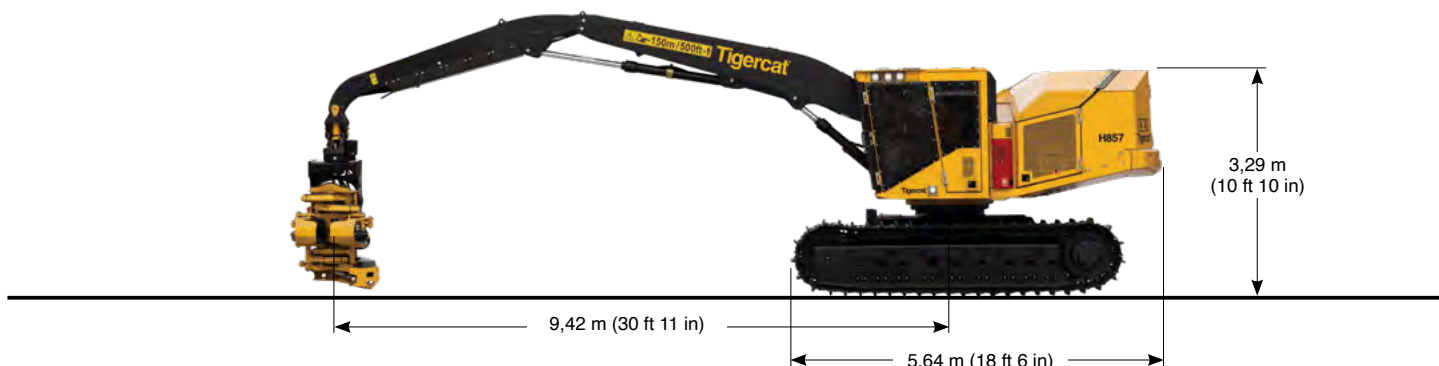

Scan the QR code then click 'SPECS' for a full list of machine specifications for the H857 harvester.

LH857 HARVESTER

POWER: 212 kW (284 hp)
 SWING RADIUS: 3 m (10 ft)
 WEIGHT: 39 100 kg (86,000 lb)

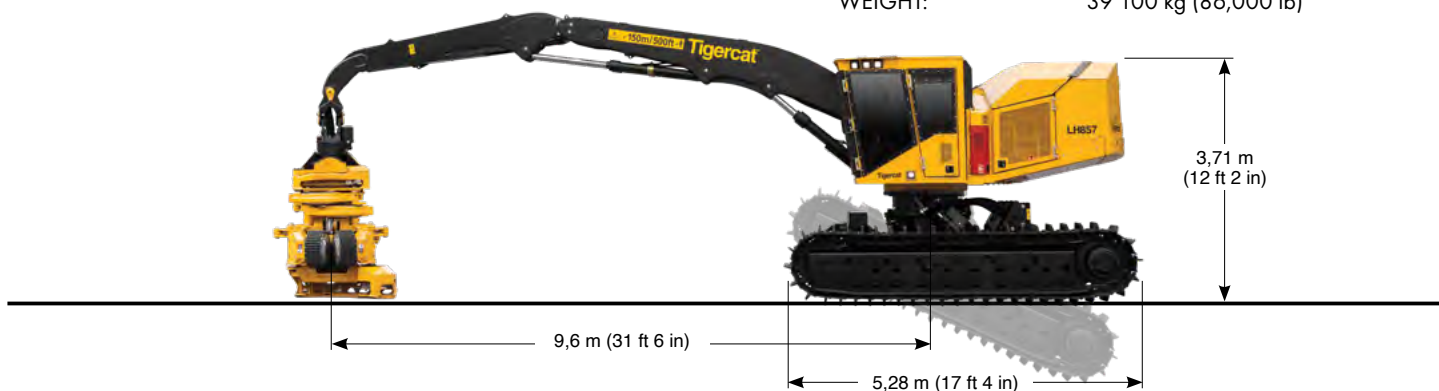

Scan the QR code then click 'SPECS' for a full list of machine specifications for the LH857 harvester.

Download the Tigercat-TCi Industries App to access the most current machine specifications for all Tigercat and TCi machine models.

EMAIL	comments@tigercat.com
PHONE	519.753.2000
WEBSITE	www.tigercat.com
ADDRESS	54 Morton Ave. East, Brantford, Ontario Canada, N3R 7J7
MAIL	Box 637 N3T 5P9

© 2001 - 2026 Tigercat International Inc. All Rights Reserved. TIGERCAT, WIDERANGE, TURNAROUND, ER, EHS, LOW-WIDE, TEC, REMOTELOG, LOGON, TCI, and their respective logos, TOUGH RELIABLE PRODUCTIVE, TIGERCAT TV, "Tigercat Orange" and BETWEEN THE BRANCHES, as well as corporate and product identity, are trademarks of Tigercat International Inc., and may not be used without permission. TIGERCAT, TCI, TURNAROUND, WIDERANGE, EHS, LOW-WIDE, ER and REMOTELOG, and their respective logos are registered trademarks of Tigercat International Inc.